

CMIPA-806-1
LTE BAND POWER AMPLIFIER

Frequency Range	791-821 MHz
Output Power (Psat)	30W Typ (CW 1 tone)
Output Power (P1dB)	20W Min (CW 1 tone)
Small Signal Gain	45 ± 1 dB Typ
Gain Flatness	± 1.5 dB Typ
Input VSWR	2:1 Max
Output VSWR	2:1 Max
Third Order Intercept Point 2-Tone @33dBm/Tone, 200kHz Spacing	+55dBm Typ +53dBm Min
Harmonics @ Pout = 20W	-50dBc Typ, -45dBc Max
Spurious Signals	-70dBc Typ, -60dBc Max
Mismatch Protection	Isolator
Normal Operating Voltage	+28 ±2 VDC
Quiescent Current	500mA
DC Current Consumption @ Pout=20W	1.8 A Typ, 2 A max
Operating Temperature	-20°C - +55°C
Start Up Temperature	-45°C
Storage Temperature	-45°C - +85°C
RF Connectors	SMA Female
Power Connector	15 Pin Dsub
Weight	0.5 kg

Important: case temperature cannot exceed 55°C Mounting plate: mount on a surface conducting heat away and/or use active cooling such as fans to maintain case temperature

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 1/19/16

CMIPA-806-1 LTE BAND POWER AMPLIFIER

Interface Connector Pin Out

<i>Pin #</i>	<i>Name</i>	<i>Description</i>	<i>Specification</i>	<i>Signal Type</i>
1	VDD	DC Power Input	+28VDC +/-2VDC	Input
2	VDD	DC Power Input	+28VDC +/-2VDC	Input
3	Return	Power and Signal Return	Ground	Output
4	Return	Power and Signal Return	Ground	Output
5	ALC Voltage	ALC Loop Control Voltage	0-1.3 VDC, Max Gain = 0V	Output
6	Mute Input	Sets amplifier to minimum gain	Normal: High Impedance > 160K ohms Minimum Gain: Pull Down <= 1K ohms	Input
7	Over Temperature Fault	Indicates device temperature is above limit	Normal= 11K pull up to +5V Fault= 1K ohm sink	Output
8	Input Fault	Low RF input level indicator	Normal= 11K pull up to +5V Fault= 1K ohm sink	Output
9	VSWR Fault	High reflected RF output power indicator	Normal= 11K pull up to +5V Fault= 1K ohm sink	Output
10	Reflected Output Power	Analog signal representing reflected RF output power	0-5V max power = 5V	Output
11	Over Drive Fault	High RF input level indicator	Normal= 11K pull up to +5V Fault= 1K ohm sink	Output
12	Forward Output Power	Analog signal representing forward RF output power	0-5V max power = 5V	Output
13	ALC Level	Analog gain control signal	0-5V 0V= min gain 5V= max gain	Input
14	High Output Power Fault	High RF output level indicator	Normal= 11K pull up to +5V Fault= 1K ohm sink	Output
15	ALC Disable	Disables Automatic Level Control loop	ALC On= Open or CMOS Logic Low ALC Off= +5V CMOS Logic High	Input



CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 1/19/16

CMIPA-806-1 LTE BAND POWER AMPLIFIER

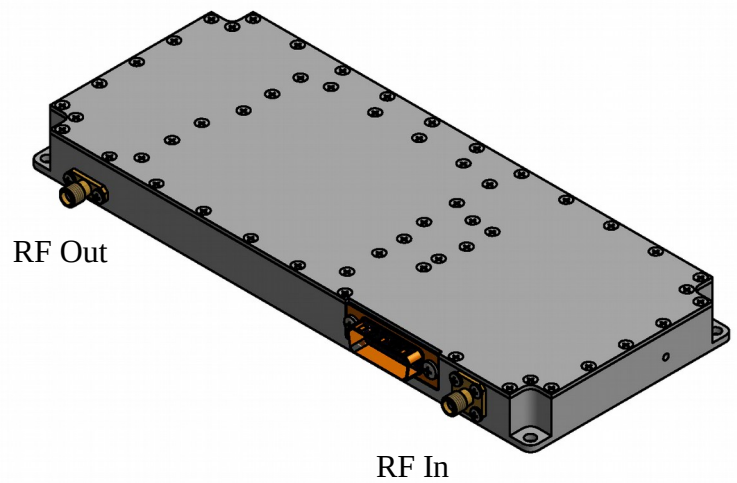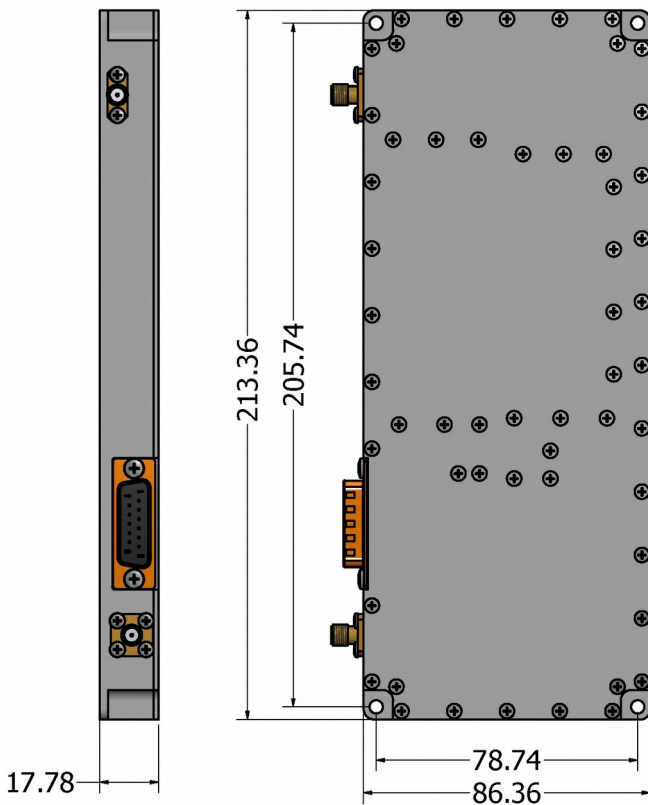

All Dimensions In mm

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 1/19/16