

The antenna AD-21/2G6G is broadband dipole mobile antenna intended for use with portable communication systems, broadband receivers and RF jamming. The antenna is covering frequency range from 2000 to 6000 MHz. The antenna is composed of two parts.

First part is antenna radiator which is a dipole ("center-fed"). The radiator of the antenna is fully enclosed in a hard plastic radome.

Other part of the antenna is a low profile magnet base. It is composed of aluminium housing and three neodymium magnets. The neodymium magnets are the strongest type of permanent magnet commercially available, the pull force of one magnet is 35 kg, so the base can be used in hardest environmental conditions and even on (MIL rough) thick painted vehicles. Magnet base has integrated low-loss coaxial cable RG-58 length of 2 meters and ended with required coaxial connector.

Frequency range	2 - 6 GHz
Impedance	50 ohms
VSWR	< 3.5:1 (see diagram)
Maximum power	50 W CW
Polarization	Linear Vertical
Gain	-3 ... +1 dBi (see diagram)
Radiation Pattern	omnidirectional
Connector	N male
Height	235 mm
Weight - antenna	0.2 kg
Weight - magnet mount	0.7 kg
Weight - fixed mount	0.2 kg
Radome Diameter	32 mm
Temp. range - operating	- 40....+70 °C



**Antenna  
AD-21/2G6G-M**



**Fixed mount  
ADN-21/N-LL**






**Magnet mount  
ADM-21/N-LL**

#### VERSIONS:


**AD-21/2G6G-N:** broadband dipole antenna with N male connector

**AD-21/2G6G-F:** antenna **AD-21/2G6G-N** with the fixed mount **ADN-21/N** for mobile applications


**AD-21/2G6G-M:** antenna **AD-21/2G6G-N** with the magnet mount **ADM-21/N** for mobile applications

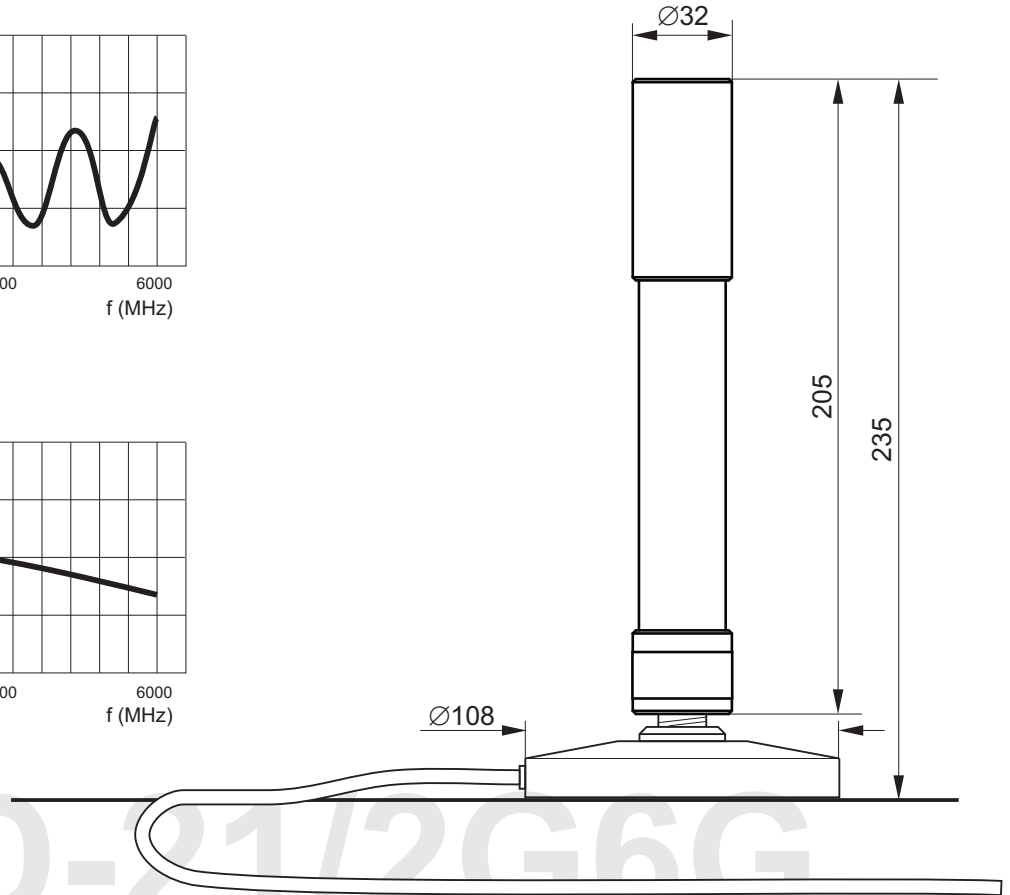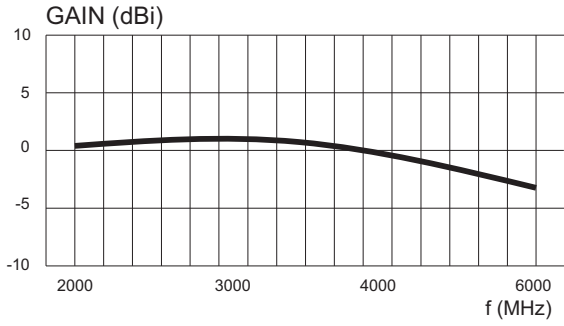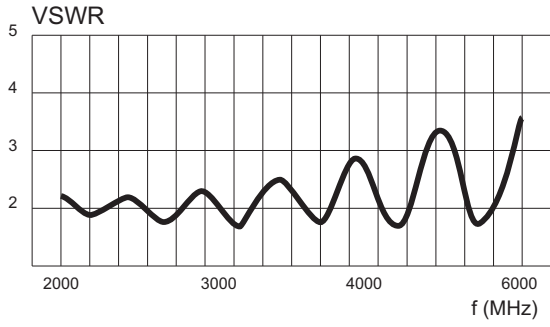


Rad. Pattern E-plane  
Frequency: 2 GHz

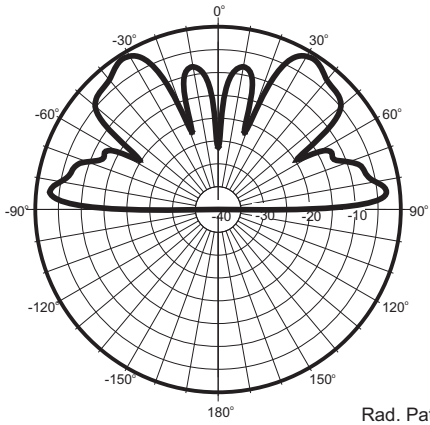


Rad. Pattern E-plane  
Frequency: 3 GHz

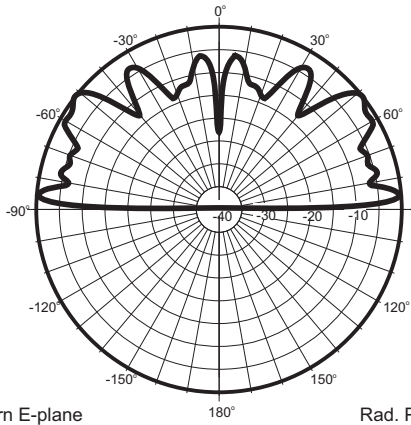

Rad. Pattern E-plane  
Frequency: 4 GHz

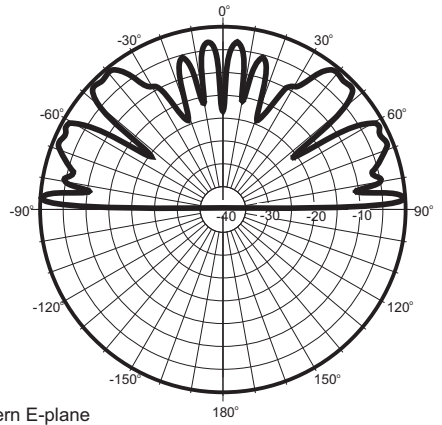

Rad. Pattern E-plane  
Frequency: 5 GHz

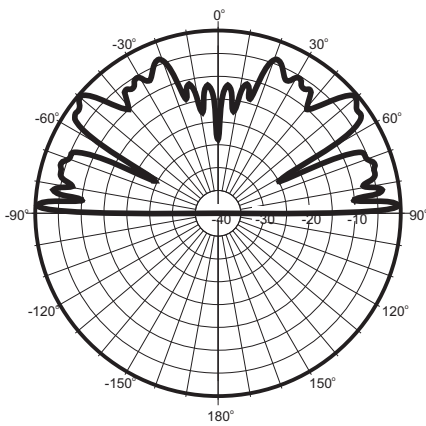

Rad. Pattern E-plane  
Frequency: 6 GHz

