




CMIBF-1450X500-J1

Interdigital Filter

Electrical Specifications

Parametric	Specifications
Center Frequency(F0)	1450MHz
3dB Bandwidth	≥1200~1700MHz
Insertion Loss at F0	≤1.0dB@1450MHz
Pass Band VSWR	≤1.5:1
Stop Band Rejection	≥40dB@DC~1090MHz ≥40dB@1800~4000MHz
Impedance	50Ω
Connectors	SMA-Female
Power Handling	≤2W
Surface Finish	Silver Paint
Configuration	See Attached Drawing (Dimensions are in inches [mm])

Outline Drawing

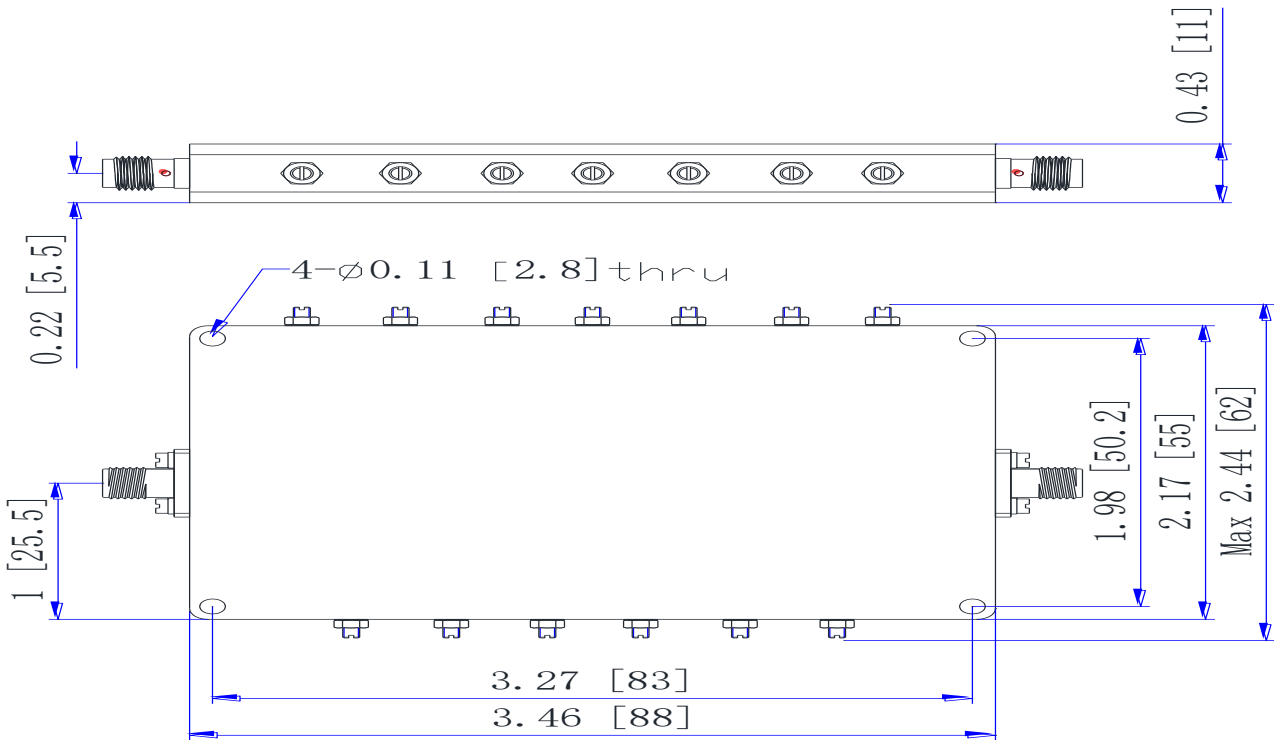

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 05/29/2018