

Rev. A



The antenna AD-18/D-3512 is a wideband mobile VHF/UHF antenna for frequency range from 25 to 512 MHz, mainly intended for use in heavy duty mobile applications.

The antenna is composed of three main parts: antenna base, lower and upper radiating element. The antenna base is made of aluminum and durable plastic materials. Inside the base is the matching circuitry and (optional) GPS antenna. Stainless steel spring absorbs the shocks and the vibrations, in addition protects the antenna against impacts. Both radiating elements are made of composite materials enable outstanding strength and roughness even in hardest conditions of use.

The antenna base has four mounting holes equally spaced on a 4.5" (114.3 mm) circle which complies with NATO standard. Different base plate dimensions are available on request.

The antenna radiator is painted with military green (RAL-6014) two-component UV resistant paint.

ELECTRICAL SPECIFICATIONS - VHF/UHF:

ELECTRICAL SPECIFICATIONS - GPS:

MECHANICAL SPECIFICATIONS:

Design

End fed whip (VHF); Center-fed dipole (UHF); patch antenna with LNA (GPS)

Height

Weight

Max. high voltage rating

Temperature range - in use

End fed whip (VHF); Center-fed dipole (UHF); patch antenna with LNA (GPS)

3.8 kg

16 kV

SMA female

Temperature range - in use
-50 ... +55 °C
Temperature range - in stock
Wind rating
Color
-55 ... +75 °C
45 m/s (160 km/h)
MIL Green

VERSIONS:

Connector

AD-18/D-3512: antenna with N female connector


AD-18/D-3512-G: antenna with N female connector and active GPS antenna (L1) in the antenna base


AD-18/D-3512-BNC: antenna with BNC female connector


AD-18/D-3512-G-BNC: antenna with BNC female connectorand active GPS antenna (L1)


in the antenna base



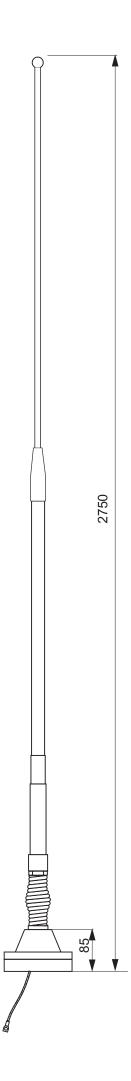

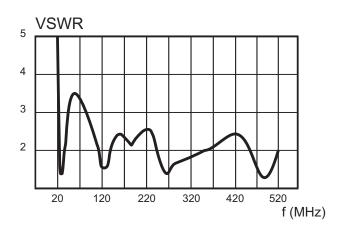

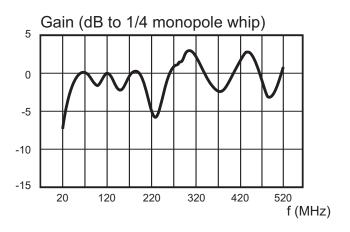

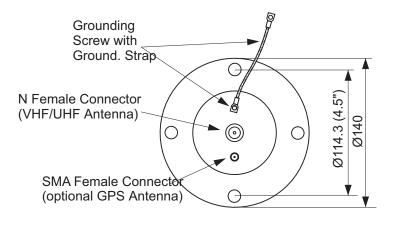

ANTENNA BASE -BOTTOM VIEW