




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBF-172.3X4-1 Band Pass Cavity Filter

Parameters	Specifications
Frequency Range	170.3~174.3MHz
Insertion Loss	≤0.8dB
VSWR	≤1.5:1
Rejection	≥60dB@DC~150.3MHz ≥40dB@150.3~160.3MHz ≥40dB@184.3~194.3MHz ≥60dB@194.3~210MHz
Power Handling	180W
Connectors	N-Female
Ports Impedance	50 Ohms
Temperature	-20°C~+65°C
Surface Finish	Black Paint
Dimensions	See Attached drawing (All dimensions are in Inches[mm])

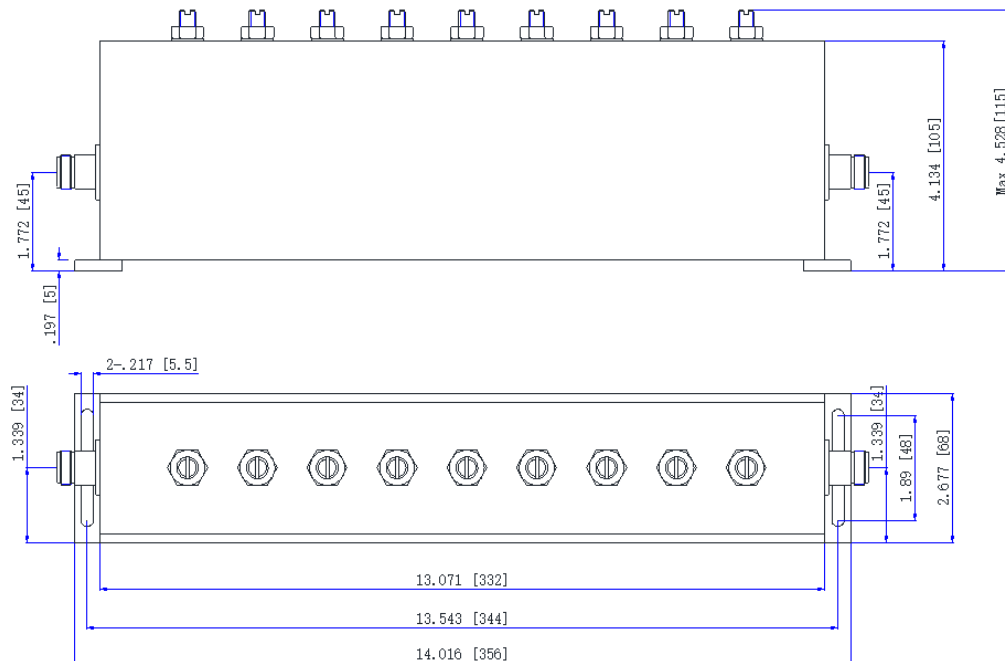

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 6/22/2018