




# CORRY MICRONICS, INC PRODUCT SPECIFICATION

## CMIBF-18000X4300 Band Pass Cavity Filter

Parameters	Specifications
Frequency Range	15.85~20.15GHz
Insertion Loss	≤3.0dB@18GHz
Return Loss	≥10dB (Typ. 15dB)
Rejection	≥25dB@13.15Hz, 22.6GHz ≥40dB@11.65GHz, 24.3GHz
Input Power	1W
Port Connectors	SMA-Female
Impedance	50 Ω
Operating Temp.	-55°C~+85°C
Surface Finish	Silver Plating
Dimensions	See Attached drawing (All dimensions are in Inches[mm])

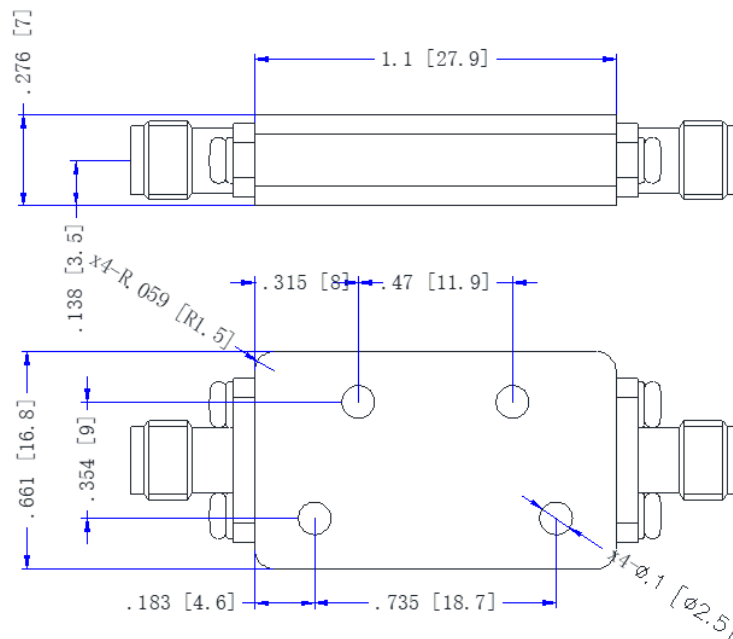

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 6/25/2018