




CORRY MICRONICS, INC PRODUCT SPECIFICATION

**CMIBF-2300X230-2**  
**Cavity Filter**

**Electrical Specifications**

Parameters	Specifications
Frequency Range	2185~2415MHz
Insertion Loss	≤1.2dB
VSWR	≤1.3:1
Rejection	≥45dB@1960-2060MHz ≥45dB@2540-2640MHz ≥50dB@4400-4800MHz
Port Connectors	Input: Pin Ø0.02"x0.08" [Ø0.5mm x2mm]; Output: SMA-Female
Power Handling	20W
Operating Temperature	-40°C~+70°C
Surface Finish	Natural color conductive oxidation
Dimensions	See Attached Drawing (Dimensions are in inches[mm])

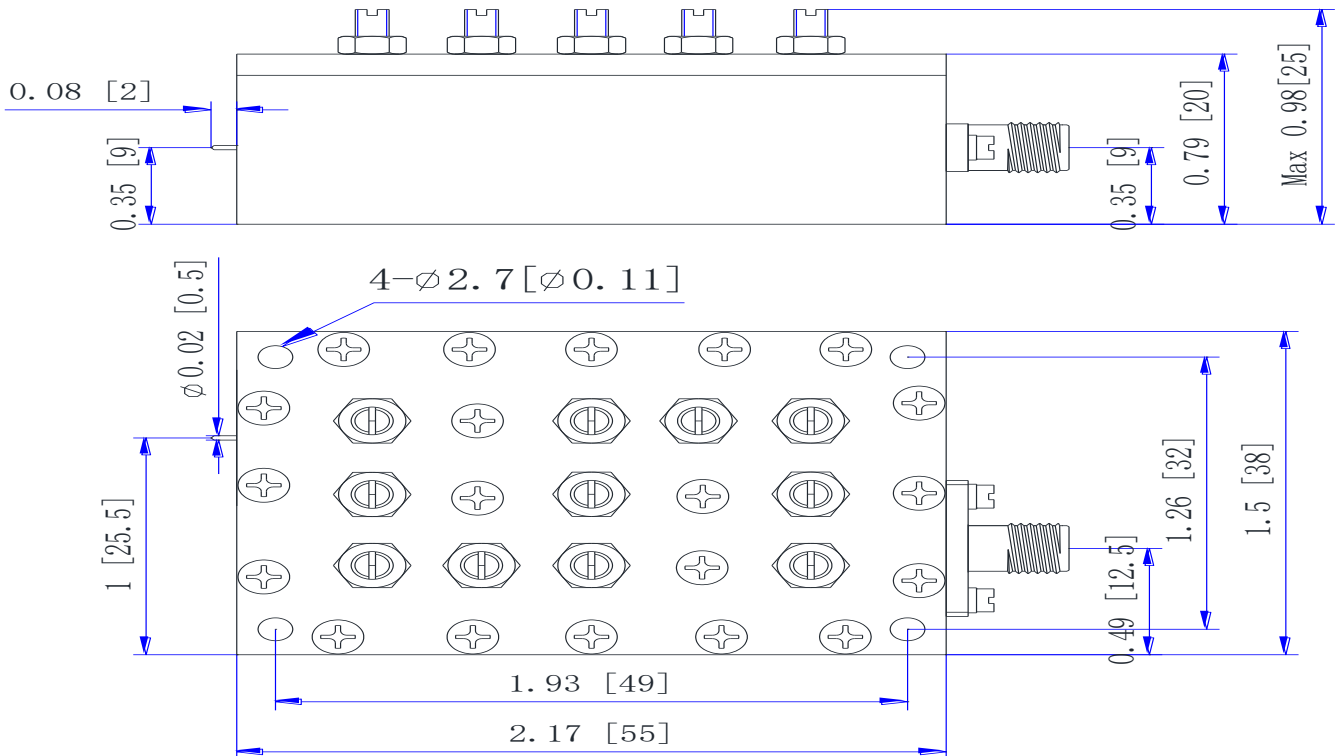

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 05/29/2018