

CMIBPF-1680-110W
Band Pass Filter

Frequency Band	1600 – 1760 MHz
Insertion Loss	≤ 1.0 dB Max
Ripple	< 0.5 dB over any 4 MHz
Rejection @ 900 – 1500 MHz	≥ 50 dB
Rejection @ 1800 – 2000 MHz	≥ 25 dB
Rejection @ 2000 – 2400 MHz	≥50 dB
Rejection @ DC – 900 MHz	≥60 dB
Rejection @ 2400 – 6000 MHz	≥60 dB
Band Rejection @ 1575 ± 2MHz	>55 dB
Band Rejection @ 1585 MHz	>15 dB
VSWR	≤ 1.4 Max
Group Delay Variation	<5 ns over any 4MHz
Impedance	50 Ω
Peak power	110W with load VSWR = 3.0:1
Connector	SMA Female
Sealing	Fine leak test in accordance with MIL-STD-883F, Method 1014.11 Bomb condition: 45±2[psia], minimum exposure time 2 [h], maximum dwell 1[h]. Reject limit 1X10 ⁻⁷ [atm*cc/s*He]
Weight	230Gr. Max
Operating Temp	-40 to +85 °C
Storage Temp	-55 to +95 °C
Humidity	95%RH @ 35°C
Salt Fog	The level of exposure to salt atmosphere shall be in accordance with MIL-STD-810F, Method 509.4,5%NaCl@35°C, 2X24 hours of exposure +2X24 hours of drying.
Altitude	45000 ft.
Vibration	12 G RMS Random @ 20-2000Hz

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407


(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 5/28/15

CMIBPF-1680-110W Band Pass Filter

Shock	All axis saw tooth 20G/0.011(sec) All axis half sine 30G/0.040(sec)
Application	Indoor
Material	Aluminium alloy 6061-T651
Surface Treatment	Conversion Coating FER MIL-C-5541 CLASS 1A
Painting	Apply Paint: Black Paint
Packing shipment	FER PS 38-576104

All Dimensions in mm

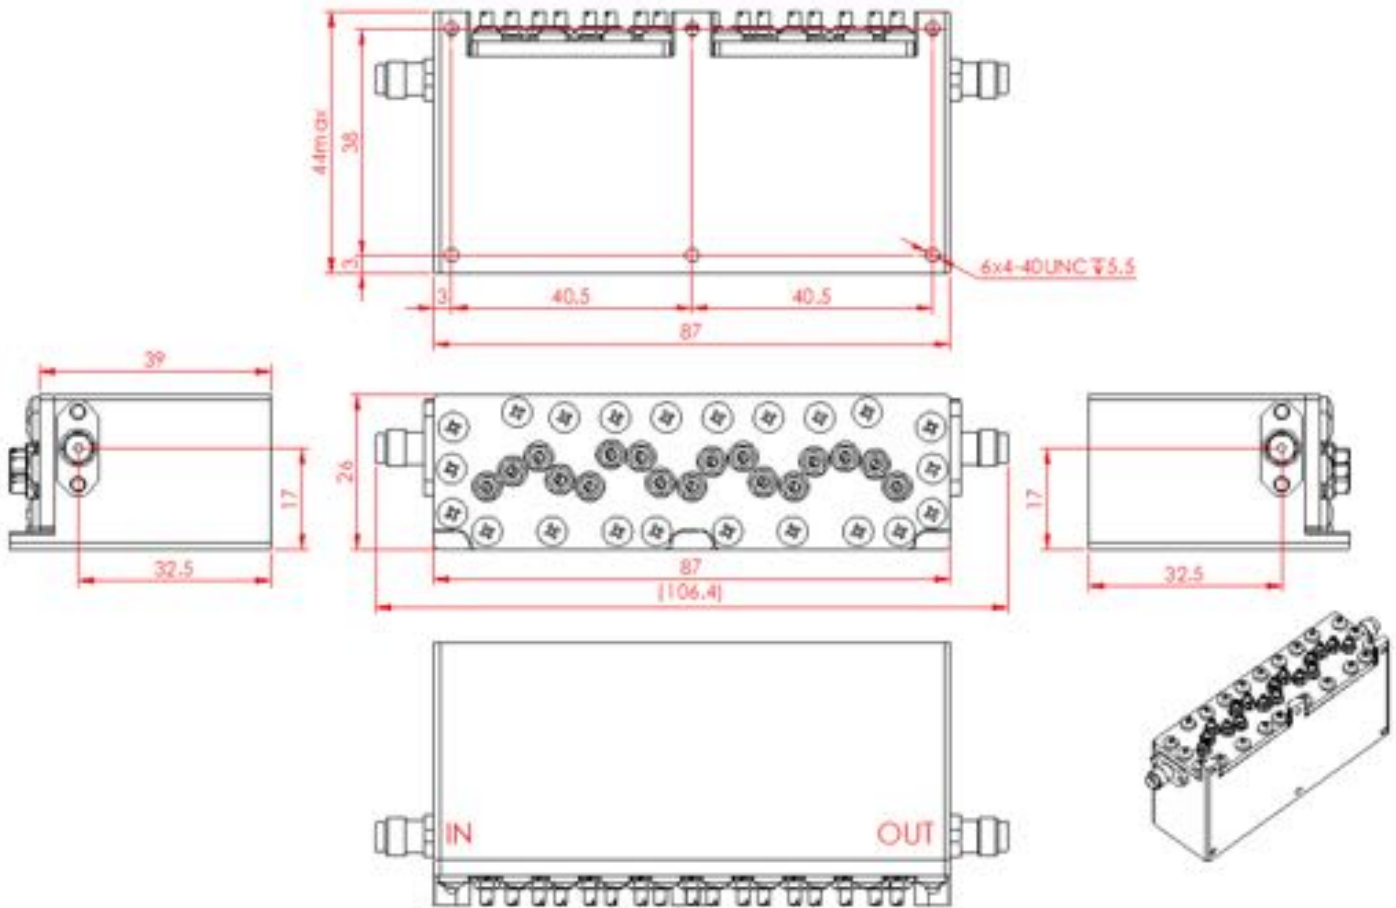

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 5/28/15