



CORRY MICRONICS, INC PRELIMINARY SPECIFICATION

# CMIBF-2437-75MP

## Plastic Light Weight Cavity Filter

### Electrical Specifications

Frequency Range	2400 – 2475 MHz
Insertion Loss	≤ 0.5 dB
Pass Band Ripple	≤ 0.5 dB
VSWR	≤ 1.4:1
Rejection	DC~2100 MHz = ≥ 50 dB 2100 MHz~2275 MHz = ≥ 30 dB 2600 MHz~2700 MHz = ≥ 30 dB 2700 MHz~7800 MHz = ≥ 50 dB
Max. Input Power	20W CW
Operating Temperature	-40° ~ +85° C
Weight Approx.	Plastic- 3.3 oz
Connector	SMA- Female
Surface Finish	Black Paint
Dimensions	See Attached Drawing All Dimensions are in Inches

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**


**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 5/21/2019



# CORRY MICRONICS, INC PRELIMINARY SPECIFICATION

## Mechanical Drawing

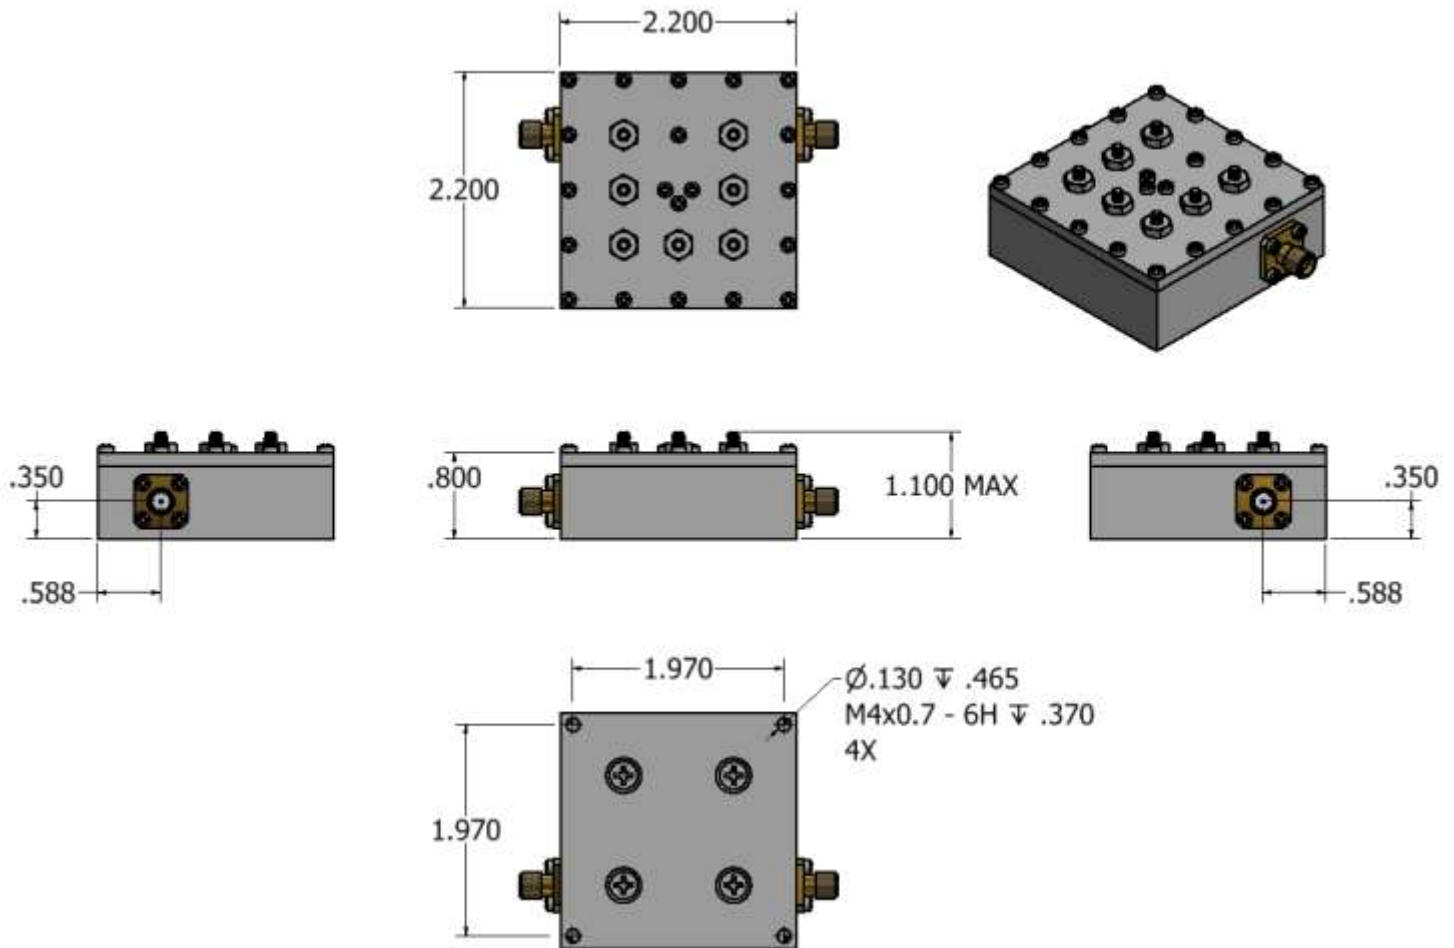

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**

**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 5/21/2019