

CDMA-06

Features:

Specially Designed for CDMA Repeater
Conforms to Technical Standards of ITU
High Rejection
High Power Handling Ability

Applications:

CDMA Optical Fiber Repeater

**Electrical Specifications:**

Frequency Range: 870 to 880MHz
Insertion Loss: 2dB maximum
1.5dB typical
Inband Ripple: 1dB p-p maximum
Return Loss: 20dB minimum
Outband Rejection:
≥40dB @ $f_0 \pm 7.5\text{MHz}$
≥90dB @ $f_0 \pm 40\text{MHz}$

Power Handling: CDMA Signal Power: 50 watts

Operating Temperature: -30 to +55 °C

Storage Temperature: -40 to +85 °C

Operating Humidity: 0 to 90%, relative



Connectors: SMA/SMA

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

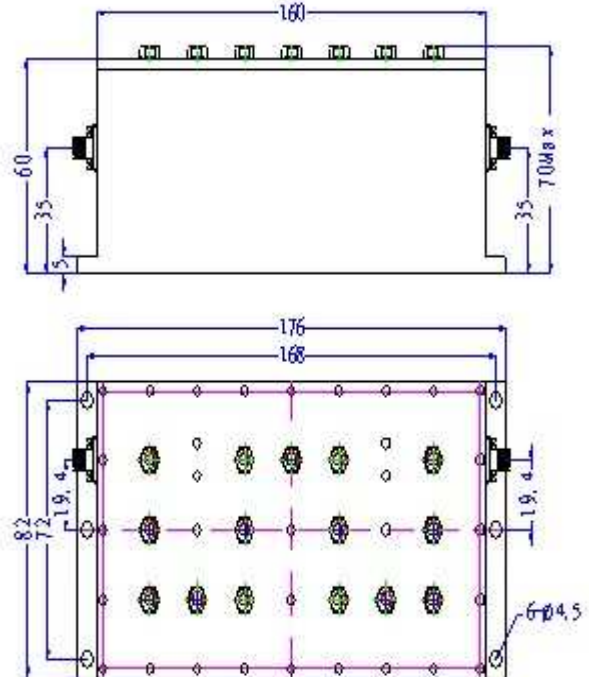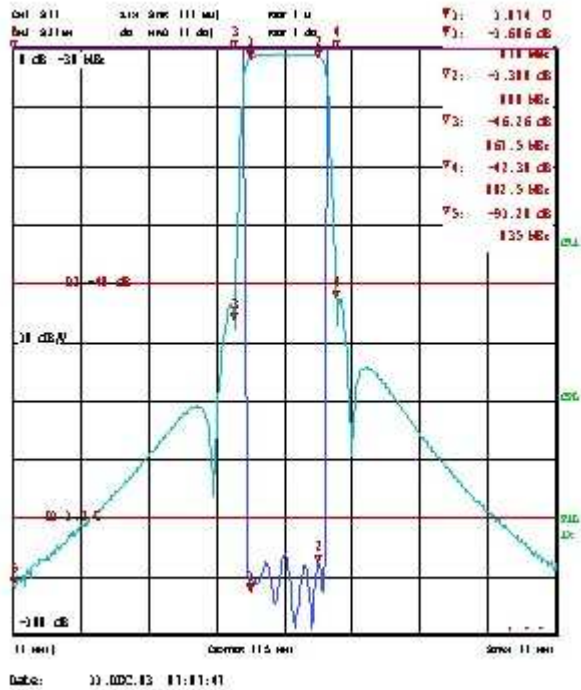

Notes:

Connector type is optional of N-type or SMA according to requirement.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.