

GSM-04

Features:

Specially Designed for GSM Repeater
Confirm to ITU Technical Standards
High Rejection
Compact Size

Applications:

GSM Repeater



Technical Specifications:

Frequency Range: 890 to 915MHz
935 to 960MHz
Insertion Loss: 1.8dB maximum
1.5dB typical
Passband Ripple: ± 0.5 dB p-p maximum
Return Loss: 18dB minimum
Outband Rejection:
 ≥ 70 dB @ Channel Isolation

Power Handling: 10 Watts

Operating Temperature: -30 to +75 °C

Storage Temperature: -40 to +85 °C

Operating Humidity: 0 to 90%, relative


Connectors: SMA/SMA

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

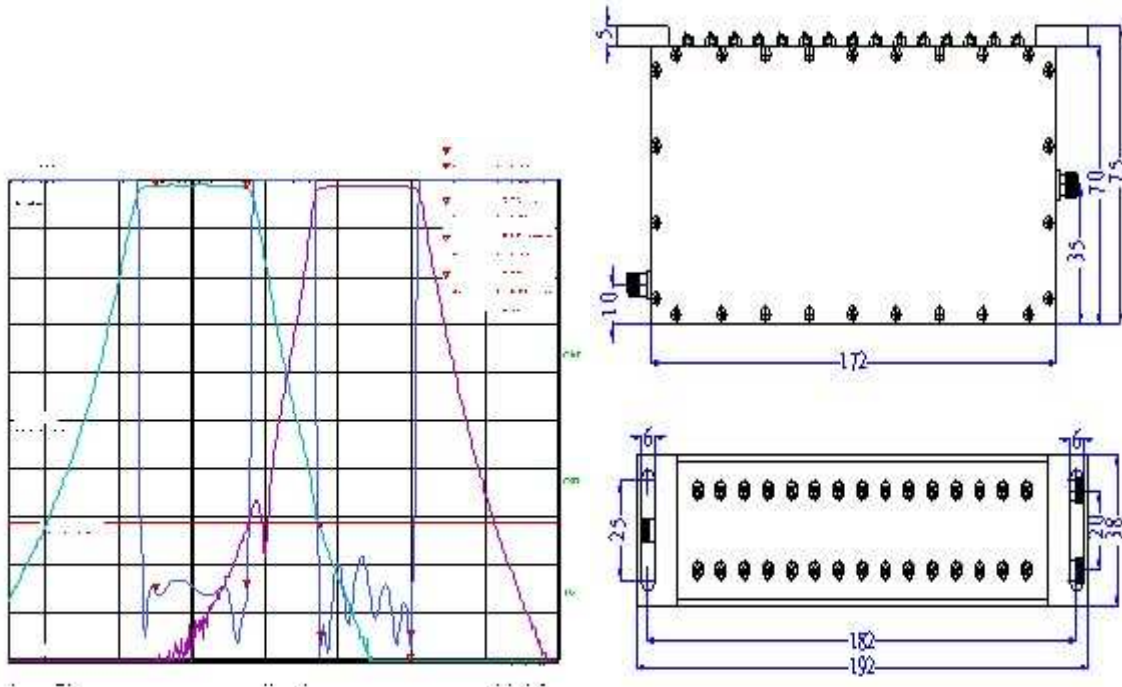

Notes:

Connector type is optional of N-type or SMA, according to requirement.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice.