


### CMISPDT5 RF Switch

Frequency	DC – 500MHz
Input Power	200W CW Max. @ 75°C
VSWR	2.0 : 1
Voltage	28VDC ± 4
Operating Temp.	-40°C to +85°C
Altitude	55,000 ft
Insertion Loss DC-4GHz	0.1dB max.
Insertion Loss 4-12.4GHz	0.2dB max.
Insertion Loss 12.4-18.0GHz	0.3dB max.
Input / Output connectors must meet environmental specs.	
Switch must return to one output as default when voltage removed.	

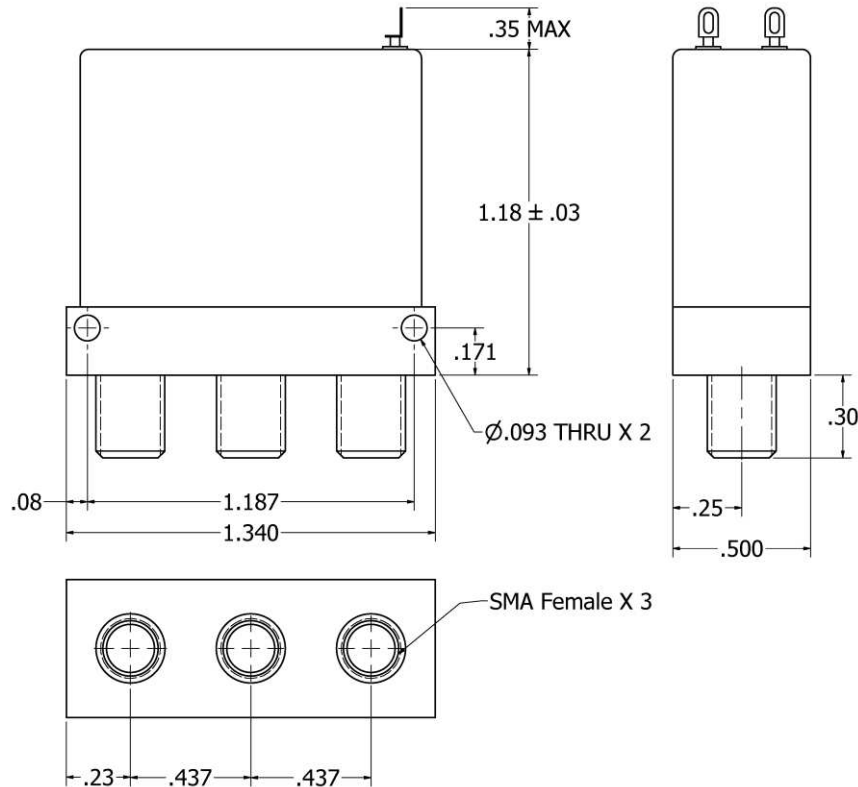

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice. 12/12/14