

# RFD-8696

## RFID Transducer


### DESCRIPTION

The RFD-8696 is a transducer for short range reading and writing of RFID tags including GEN2 tags.

Applications include printers, automation equipment, as well as others.

The transducer is ROHS Compliant.

**Contact us if you have questions about the RFD-8689's suitability for your application.**

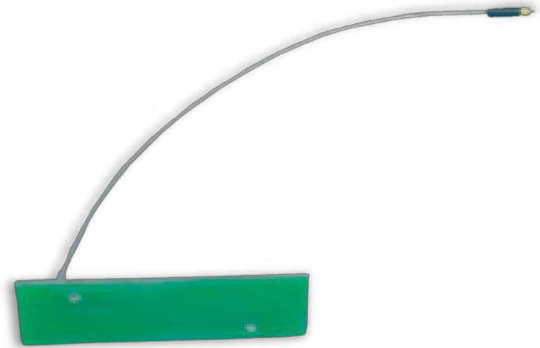

RFID Transducer

### SPECIFICATIONS

#### ELECTRICAL

Frequency Band	860 MHz to 960 MHz
VSWR	< 2.0 : 1
Polarization	Linear
Power	1 Watts CW
Connector	12.5" (31.75 cm) Pendant Cable

#### MECHANICAL

Weight	3 oz (85 g)
PCB Dimensions	4" L x 1" W (10.16 cm L x 2.54 cm W)
Cable Length	13" (33.02 cm)
Finish (Default)	Solder Mask