




CORRY MICRONICS, INC

PRODUCT SPECIFICATION

CMINF-1.2-1.65-45-P Notch Filter

Attenuation Band	1.2 - 1.65 GHz
Attenuation Level	45dB
Low Pass Band	DC to 960 MHz
High Pass Band	1805 to 2700 MHz
Pass Band Insertion Loss	1dB Max
Power Handling	12W average / 75W peak
Connectors	SMA F
Mounting Holes	Ø.129 x 4
Size	4.2" L (Plus Connectors) x 1.4" W (Plus Tuning Screws) x 1.09" H
Weight Approx.	1.2-1.65-45-P (Plastic): 4 oz
Surface Finish	Painted Black

Dimensions in Inches

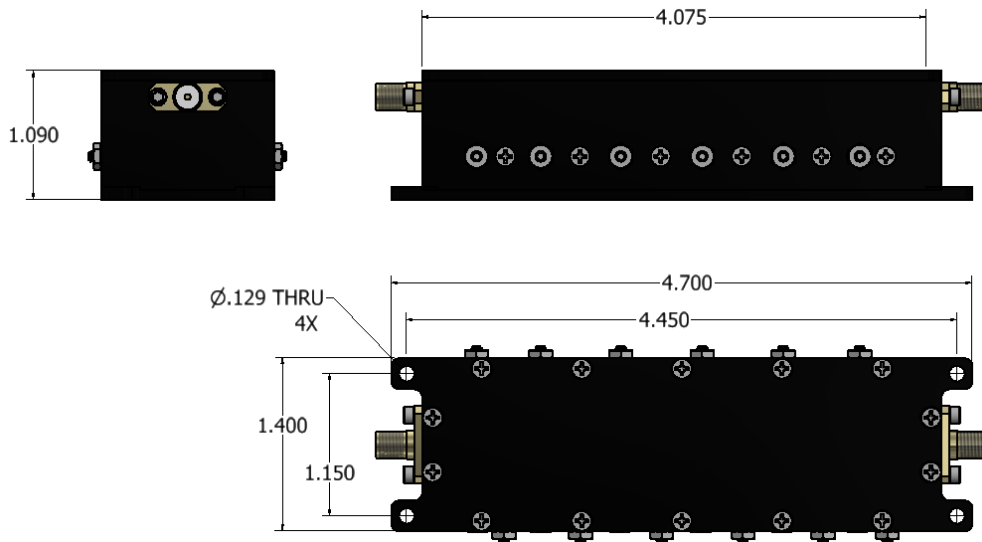

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 9/5/2018