




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBF-433-1 Cavity Filter

Parameters	Specifications
Frequency Range	428~438MHz
Insertion Loss	≤2.0dB
VSWR	≤1.5:1
Rejection	≥30dB@DC~403MHz ≥30dB@463~500MHz
Temp. Range	-10°C~+60°C
Connectors	SMA-Female
Power Handling	10W
Surface Finish	Black Paint
Impedance	50Ω
Dimensions	See Attached Drawing <i>All dimensions below are in Inches[mm]</i>

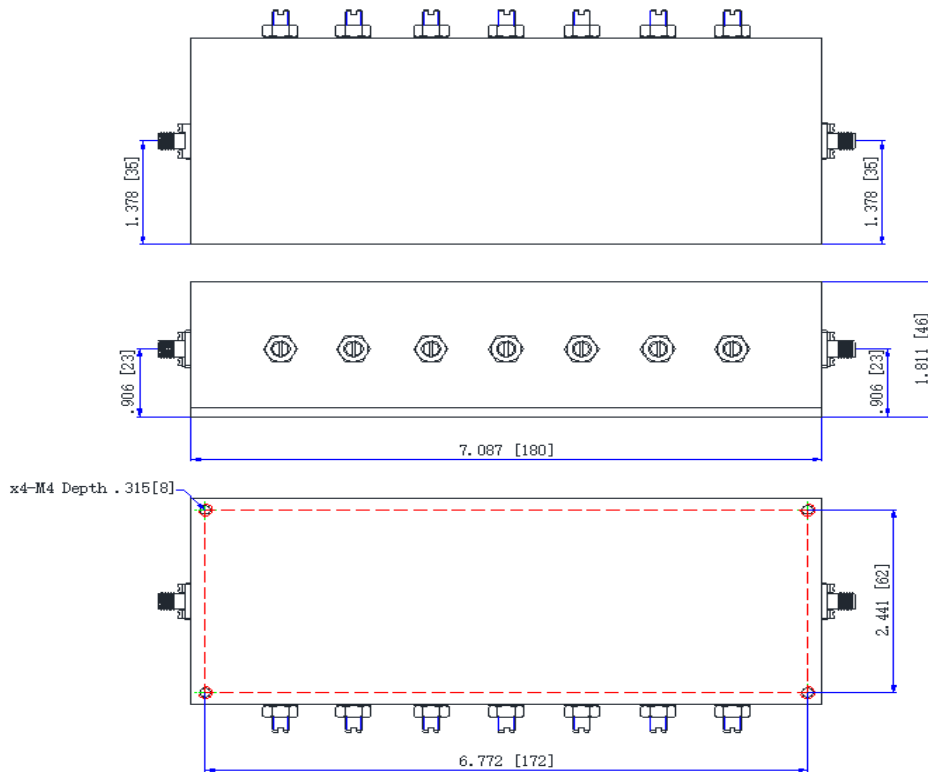

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 6/22/2018